



RoHS GP HF

REV.	ECR/N NO.	DESCRIPTION	DRAWN	DATE
A	/	NEW	_____	_____
B	/	更换图框	DENGJU	2020/12/18

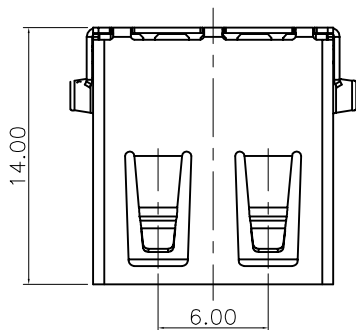

NOTE:

1. MATERIAL:

HOUSING: PBT,UL94V-0; COLOR: BLACK
 CONTACT: C2680 T=0.2±0.03MM
 SHELL: SPCC T=0.3±0.03MM

2. FINISH:

CONTACT: AU G/F PLATED ON CONTACT AREA,
 TIN 80U" PLATED ON SOLDER TAILS,
 NICKEL 50U" UNDERPLATING OVER ALL.
 SHELL: CU 50U" NICKEL 80U" UNDERPLATING OVER ALL.




3. SPECIFICATION:

3.1: ELECTRICAL:


CONTACT CURRENT RATING: 1.5A
 INSULATION RESISTANCE: 1000MΩ MIN.
 CONTACT RESISTANCE: 30 mΩ MAX.
 DIELECTRIC WITHSTANDING VOLTAGE: 500V/AC 1MINUTE

3.2 MECHANICAL:

MATING FORCE: 3.57KGF MAX.
 UNMATING FORCE: 1.0KGF MIN.

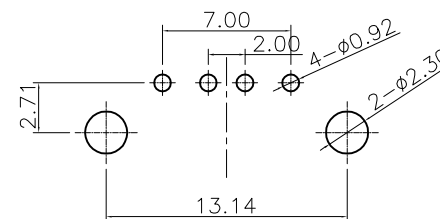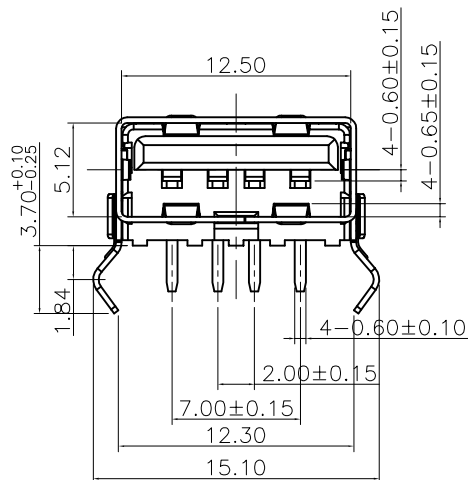

Recommend P.C.B LAYOUT



TOLERANCE	MODEL NAME: 单层USB A-TYPE 2.0 90度 PBT黑胶环保防火 端子G.F SPCC铁壳光面 无卷边脚宽15.1 特殊包装	DRAWN: DENGJU
X.X ±0.35	MODEL NO: WLUS-254A	CHECKED: YAOSHIXUAN
X.XX ±0.25	UNIT: mm	APPROVED: WUHUAMING
X.XXX ±0.10	SCALE: 1:1	DATE: 2020/12/18
ANGLE ±2.0°	REVISION: B	DWG NO:
	SHEET: 1/1	FILE: C
	深圳市兴万联电子有限公司 SHENZHEN XING WAN LIAN ELECTRONICS CO.,LTD.	